


MODEL 410AWX

Four-Post Lift




Perfect and flexible for reliable repairs, tire services, and wheel alignment application.




Extendable platform suitable for various wheel bases vehicles.



New rear-slip ball sets.




Adjustable turnplate blocks to fit various wheel bases vehicles.

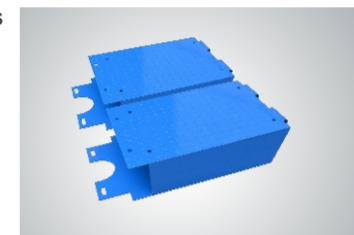

Optional platform extension kits adds an extra 610mm length to the platform. Kits No.:40903




Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102

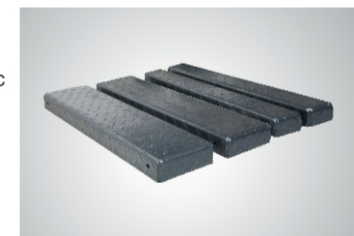

Optional adjustable blocks for alignment 4 post lift. Kits No.: 40905 (used with Kits 40903)





Optional LED lighting: 24V LED light. Kits No.:40102002

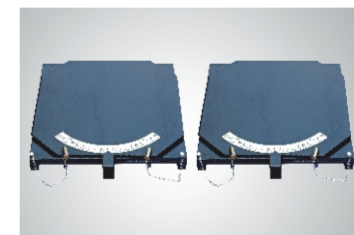

Optional Turnplates. kits No. :40101

FEATURES

- 4500kg lifting capacity, 4-post with small scissor lift. Great for light-duty cars, vans, and trucks.
- Mechanical self-locking system and air-driven safety release.
- Dual safety mechanism provides additional safety.
- Adjustable turnplate blocks to fit different wheelbases.
- Skid proof diamond platform provides traction for the tires to stay put.
- Aero cable is used for synchronization.
- Strict quality control of hydraulic cylinders with flow restrictor for a stable and smooth speed.

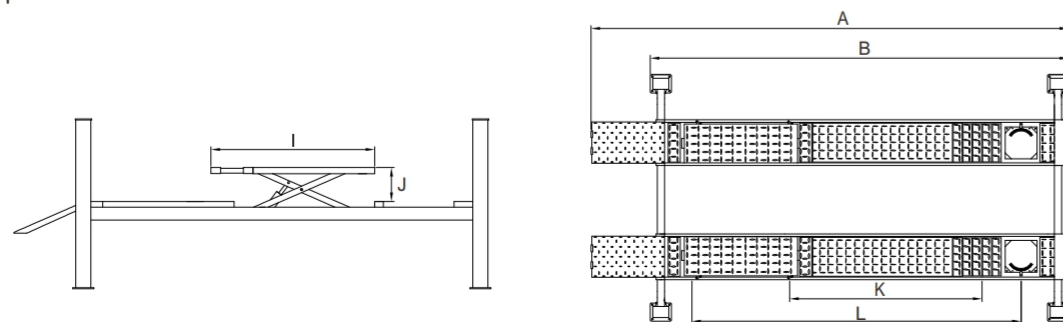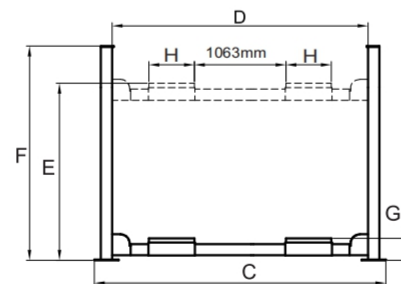

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E	F	G	H	I	J	K	L	Gross Weight	Motor
			Overall Length (Inc Ramps)	Overall Length (No Ramps)	Overall Width	Width Between Columns	Lifting Height	Overall Height	Minimum Height	Runway width	Scissors Length	Scissors Lifting Height	Min. Four wheel Align	Max. Four wheel Align		
410AWX	4.5T (10,000 lbs)	46 Seconds	5910mm (232 5/8")	4998mm (196 3/4")	3356mm (132 1/8")	3000mm (118 1/8")	1915mm (75 3/8")	2185mm (86")	220mm (8 5/8")	545mm (21 1/2")	1720-2070mm (67 5/8"-81 1/2")	420mm (16 1/2")	2080mm (81 7/8")	3905mm (153 3/4")	1728kg (3,810lbs)	3.0HP