

MODEL 414 414E 418  
Non-Alignment Four-post Lift



Optional Jack RJ-8A with 1.5" and 2.5" extension adaptors included



As another line of PEAK family,our four post lifts share the same name of quality,longevity,safety and with more flexible option.




EXCLUSIVE FEATURE !

Electric control device With UP, LOCK and DOWN buttons  
With C.E. stop switch at 300 mm from ground and alarm tone when lowering down from 300 mm to ground make the lift more safety.



Oil-water separator and Solenoid air valve are installed on the power side column.

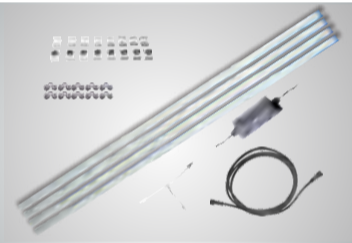

The 4-post LED Light kits is fitted for every model of PEAK 4-post lifts .  
Kits No.:40102002




Optional Rolling Jacks  
J6H: manual hydraulic type 2.8 T  
J6A: pneumatic hydraulic type 2.8 T  
RJ - 8A: pneumatic hydraulic type 3.5 T  
RJ-10A:pneumatic hydraulic type 4.5T

FEATURES


- Electric-air control operation system
- Mechanical self-lock and air-driven safety release
- Electrical hydraulic power system, cable-driven
- Skid proof diamond platform.
- Adjustable platform and adjustable safety lock ladders
- Dual safety device: In case the primary safety locks are out of operation, the lift would also be locked automatically by a second safety device



Optional Air Line Kits  
All peak four post lifts are designed to use the air line kits for rolling jack.  
Kits No.:40102(414)  
Kits No.:40106(418)

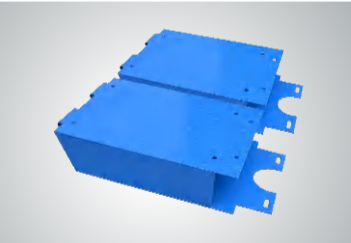

Optional platform extension kit add 660mm/26"(41403) and 737mm/29"(41801) extra length to the platform.  
Kits No.:41403(414 414E)  
Kits No.:41801(418)

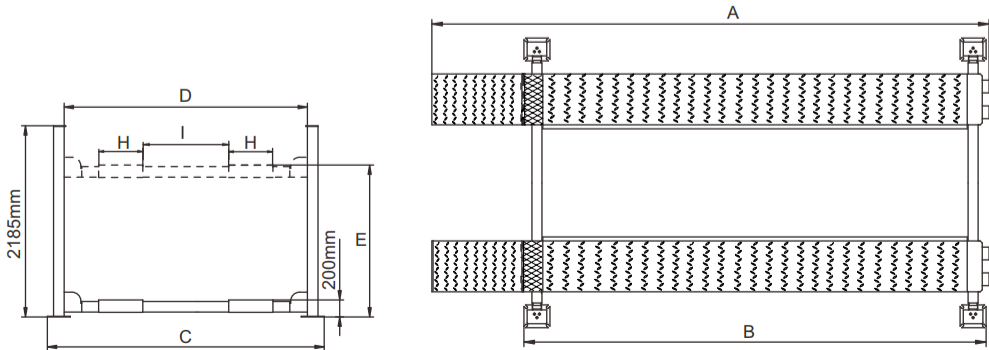

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E	H	I	Gross Weight	Motor
			Overall Length (Inc. Ramps)	Overall Length (No Ramps)	Overall Width	Width Between Columns	Lifting Height	Runway width	Width Between Runway		
414	6.5T (14,000 lbs.)	76 Seconds	6541mm (257 1/2")	5500mm (216 1/2")	3324mm (130 7/8")	2946mm (116")	1865mm (73 1/2")	508mm (20")	Max.1385mm (54 1/2")	1288kg (2,840 lbs)	4.0 HP
414E	6.5T (14,000 lbs.)	76 Seconds	7265mm (286")	6224mm (245")	3324mm (130 7/8")	2946mm (116")	1865mm (73 3/8")	508mm (20")	Max.1385mm (54 1/2")	1655kg (3,649 lbs)	4.0 HP
418	8T (18,000 lbs.)	81 Seconds	7449mm (293 1/4")	6408mm (252 1/4")	3482mm (137 1/8")	3108mm (122 3/8")	1865mm (73 1/2")	558mm (22")	1302mm (51 1/4")	1602kg (3,532 lbs)	4.0 HP