




Single-Point Safety Release

Peak is proud to introduce a revolutionary designed manual single-point safety release system for their base plate lifts. The super single-point manual release allows the operator to unlock both column locks from one column. Many manufacturers incorporate electro-mechanical lock release systems that are complicated and unreliable.

A manual single-point lock release system provides a mechanically proven system that will perform flawlessly for many years.

INNOVATION: Peak introduces a revolutionary double lock system installed in both lift columns. This new lock system incorporates two locking mechanisms for added safety. The double lock system is automatically activated as the lift is raised. When the vehicle reaches the desired height, the lift is lowered into the next lowest locking position. When the vehicle is ready to be lowered to the ground, the double lock system is disengaged by pulling a handle located near the power unit. There is no need for the operator to go to both columns and manually unlock both column locks. All lifting and lowering operations are controlled from one column post. Double safety locks built into each column operated by one release level make the Peak 209, base plate lift the safest and easiest to operate base plate lift in the industry. **Two locks... one release... available only from PEAK!**

The Peak 209 includes four pieces three-stages arms. Stackable rubber pad come with height extension adapters. The Peak 209 incorporated an innovative manual single-point safety release, automatic arm restraints, powder coat finish, heavy-duty chain mounted over dual reliable hydraulic cylinders.

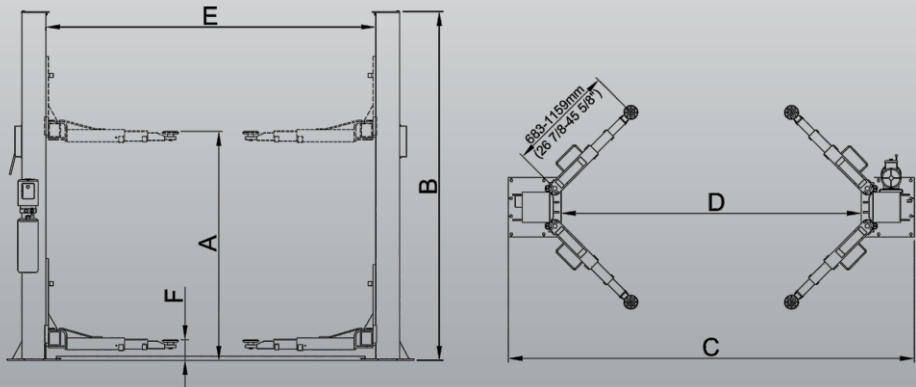

ADVANCE LINE OF TWO POST LIFTS

If you're a customer need high quality products and advanced features, our advance line of two post lifts is your choice !

FEATURES

- 4000kg (9,000 lbs) Capacity.
- Dual hydraulic chain-drive cylinders manufactured on high standard.
- Aero cable used for synchronization.
- Self-lubricating UHMW Polyethylene sliders and bronze bushings.
- Single-point safety release allows technician to easily release both column locks from one column.
- Automatic arm restraints.
- Stackable rubber pads.



EXCLUSIVE FEATURE !
Two Locks, One Release, Only Available By PEAK



The stackable rubber pad assembly with 1.5"、2.5" extension adapters.



4 three-stages arms are suitable for more vehicles. Extremely high carriages, automatic arms restraints, protect rubber door guards, self-lubricated sliders... make PEAK compact line of two post lifts with many advanced features and high quality.



Optional 24V LED lights for Floor plate 2-post lifts. Kits No.: 20101.

SPECIFICATIONS

Model	Style	Lifting Capacity	Lifting Time	A	B	C	D	E	F	Gross Weight	Motor
				Lifting Height	Overall Height	Overall Width	Drive-Thru Clearance	Width Between Columns	Minimum Pad Height		
209	Floorplate Chain-driven	4.0 T (9,000 lbs.)	45 Seconds	1815-1917mm (71 1/2" - 75 1/2")	2742mm (108")	3350mm (131 7/8")	2513mm (99")	2780mm (109 1/2")	90mm (3 1/2")	610kg (1,345lbs)	3.0HP