



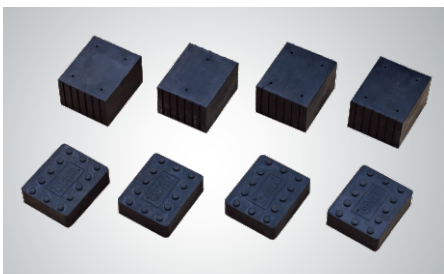


FEATURES


- Multifl safety locks with mechanical release.
- Portable unit is easy to move with the power unit stand
- High speed: From 0-600 mm (23-5/8") in just 50 seconds
- Standard rubber pads included

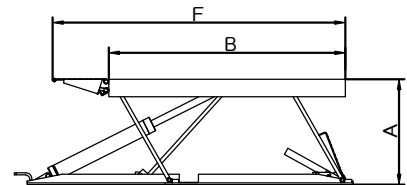

Both 1 1/2" and 3" height Rubber Pads

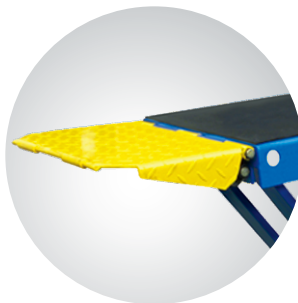

Extend the platform to 1676mm(66")

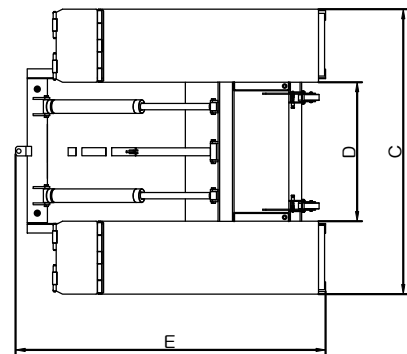

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A		B	C	D	E	F	Gross Weight	Motor
			Max. Lifting Height	Minimum Height	Runway Length	Overall Width	Width Between Runways	Overall Length	Runway Length (Inc. Ramp)		
LR10	4500kg (10,000lbs)	50S	600mm (23 5/8")	105mm (4 1/8")	1352mm (53 1/4")	1780mm (70")	868mm (34 1/8")	1938mm (76 1/4")	1676mm (66")	465kg (1025lbs)	3.0HP