



Optional Jack RJ-8A with 1.5" and 2.5" extension adaptors included


As another line of PEAK family,our four post lifts share the same name of quality,longevity,safety and with more flexible option.




**EXCLUSIVE FEATURE !**  
Electric control device With **UP, LOCK** and **DOWN** buttons  
With C.E. stop switch at 300 mm from ground and alarm tone when lowering down from 300 mm to ground make the lift more safety.



Oil-water separator and Solenoid air valve are installed on the power side column.

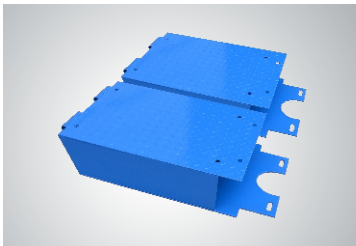

Optional platform extension kit add 660mm/26"(41403) extra length to the platform.  
Kits No.:41403 (414 414E )

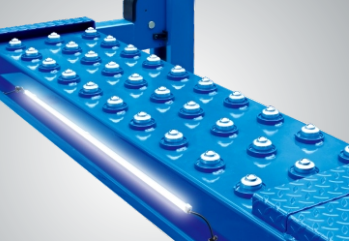

The 4-post LED Light kits is fitted for every model of PEAK 4-post lifts .  
Kits No.:40104




**Optional Air Line Kits**  
All peak four post lifts are designed to use the air line kits for rolling jack.  
Kits No.:40102(414/414A /414AE/418/418A)



**Optional Rolling Jacks**  
J6H: manual hydraulic type    2.8 T  
J6A: pneumatic hydraulic type    2.8 T  
RJ - 8A: pneumatic hydraulic type 3.5 T  
RJ-10A:pneumatic hydraulic type 4.5T

FEATURES

- Electric-air control operation system.
- Mechanical self-lock and air-driven safety release.
- Electrical hydraulic power system, cable-driven.
- Skid proof diamond platform.
- Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 1194mm and maximum distance is 1385mm. Only be (414 414E ).
- Dual safety device :In case the primary safety locks are out of operation, the lift would also be locked automatically by a second safety device.

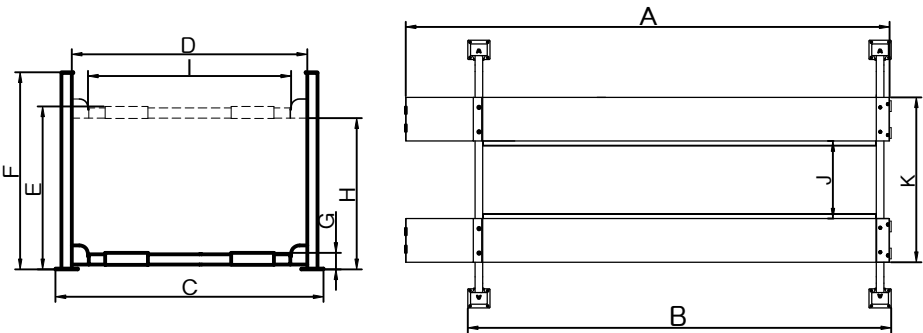

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A Overall Length (Inc.Ramps)	B Overall Length (No Inc.Ramps)	C Overall Width	D Width Between Posts	E Max. Lifting Height	F Overall Height	G Minimum Height	H Max. Underneath Height	I Drive-Thru Clearance	J Width Between Runways	K Outside Edge of Runways	Gross Weight	Motor Power
414	6.5T (14,000lbs)	76S	6541mm (257 1/2")	5500mm (216 1/2")	3324mm (130 7/8")	2946mm (116")	1865mm (73 1/2")	2185mm (86")	200mm (7 7/8")	1695mm (66 3/4")	2592mm (102 1/8")	1194mm(47") Max:1385mm (54 1/2")	2210mm(87") Max:2401mm (94 1/2")	1288kg (2,840lbs)	4.0HP
414E	6.5T (14,000lbs)	76S	7265mm (286")	6224mm (245")	3324mm (130 7/8")	2946mm (116")	1865mm (73 1/2")	2185mm (86")	200mm (7 7/8")	1695mm (66 3/4")	2592mm (102 1/8")	1194mm(47") Max:1385mm (54 1/2")	2210mm(87") Max:2401mm (94 1/2")	1345kg (2,965lbs)	4.0HP